


Baroque™
Mineral Fiber Ceilings



LOW VOC

\$\$\$\$

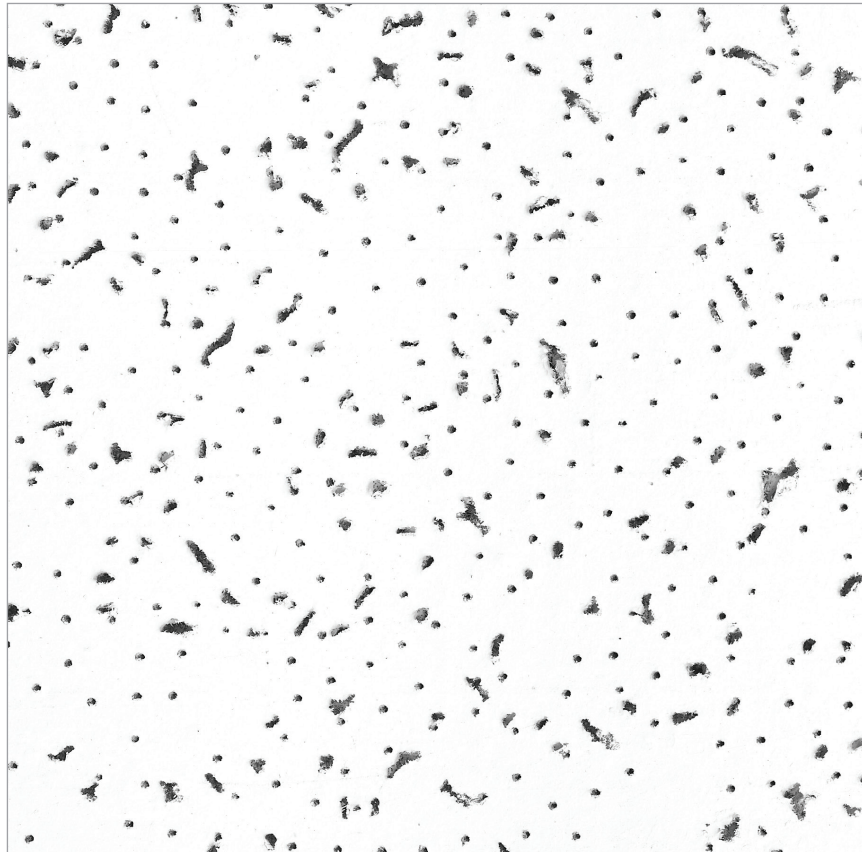

LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance

Recycled Content

● CLASS A	Pre: 28%	Post: 2%
PROTECTONE®	Pre: 37%	Post: 1%

TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages

FEATURES & BENEFITS

- 100% non-directional fissured pattern
- Higher sound absorption than comparable products
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Available in fire-rated (Protectone®) version
- Health Product Declaration (HPD) available for this product

APPLICATIONS

- Utility Areas
- Retail Warehouses
- Strip Malls
- Commercial Interior Spaces
- Offices
- Other Commercial Buildings / Space Applications



Carbon Footprint Reduction
Rapidly Renewable Resource Content
Recycled Content



EPD Available



HPD Available

AVAILABLE EDGE DETAILS



Trim
15/16 Grid



Reveal
Beveled
15/16 Grid



Narrow Reveal
Corner Bevel
9/16 Grid



Narrow Reveal
Corner Bevel
9/16 Grid Bolt Slot



Baroque™ Reveal (BET-154)

ATTRIBUTES

	DIMENSIONS INCHES	EDGE DETAIL	UL CLASSIFIED NRC	CAC	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS ASTM E1264	EMISSION COMPLIANT	RECYCLED CONTENT
BAROQUE™													
BET-157	24 x 24 x 5/8	Trim	0.60	33	Yes	Yes	—	—	0.83	—	Class A	Certified	30%
PBT-157	24 x 24 x 5/8	Trim	0.55	35	Yes	Yes	—	—	0.83	—	Protectone*	Certified	38%
BET-154	24 x 24 x 5/8	Reveal	0.60	33	Yes	Yes	—	—	0.83	—	Class A	Certified	30%
PBT-154	24 x 24 x 5/8	Reveal	0.55	35	Yes	Yes	—	—	0.83	—	Protectone*	Certified	38%
BET-150	24 x 24 x 5/8	Narrow Reveal	0.60	33	Yes	Yes	—	—	0.83	—	Class A	Certified	30%
BET-197	24 x 48 x 5/8	Trim	0.60	35	Yes	Yes	—	—	0.83	—	Class A	Certified	30%
PBT-197	24 x 48 x 5/8	Trim	0.55	40	Yes	Yes	—	—	0.83	—	Protectone*	Certified	38%
BET-194	24 x 48 x 5/8	Reveal	0.60	35	Yes	Yes	—	—	0.83	—	Class A	Certified	30%
BET-2067	20 x 60 x 5/8	Trim	0.60	35	Yes	Yes	—	—	0.83	—	Class A	Certified	30%
BAROQUE™ – METRIC													
BET-2067M	(500 x 1500 x 15)	Trim	0.60	35	Yes	Yes	—	—	0.83	—	Class A	Certified	30%

*Protectone: A fire-resistive ceiling when used in applicable UL assemblies.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

Mineral Fiber

ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern C D

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY

1-year Limited Warranty

Technical Support | certainteed.com/ceilings 800-233-8990

© 05/18 CertainTeed Corporation

CertainTeed
SAINT-GOBAIN
Ceilings